

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41130-20VV-W2

August 17, 2022

## GT-41130-20VV-W2

### Information

Model Number

GT-41130-20VV-W2

Description

GT-41130-20VV-W2, ICT/ITE Power Supply, Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, NEMA 1-15P, North America Blades, Class II 2 Conductors, Output Rating: 24 Watts, Power rating with convection cooling (W) , 10-24V in 0.1V increments, Approvals: EAC; CB 60950; Double Insulation; WEEE; RoHS; Level V; NrcAN; PSE; Ukraine; VCCI; cULus; IP41; LPS 60950; PSE; China RoHS;

Model Picture



Agency Documents

<http://www.globtek.info/certs/GT-41130-W2/>

CE EC-Declaration

[https://www.globtek.com/pdf/ec\\_declaration/a0O30000008UmaxEAC](https://www.globtek.com/pdf/ec_declaration/a0O30000008UmaxEAC)

RoHS/RoHS2 Declaration

[https://www.globtek.com/pdf/rohs\\_cert/a0O30000008UmaxEAC](https://www.globtek.com/pdf/rohs_cert/a0O30000008UmaxEAC)

REACH Declaration

[https://www.globtek.com/pdf/iso\\_certificates/REACH.pdf](https://www.globtek.com/pdf/iso_certificates/REACH.pdf)

Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41130-20VV-W2

August 17, 2022

**MODEL PARAMETERS**





Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.8A
Wattage (W)	24.0
Vout Range (V)	10-24
Efficiency Level	V
Ingress Protection	IP41
Size (mm)	50*81*31

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41130-20VV-W2

August 17, 2022

ENCLOSURE

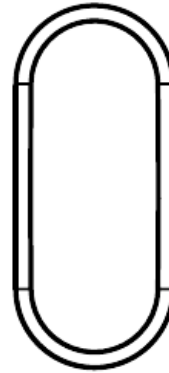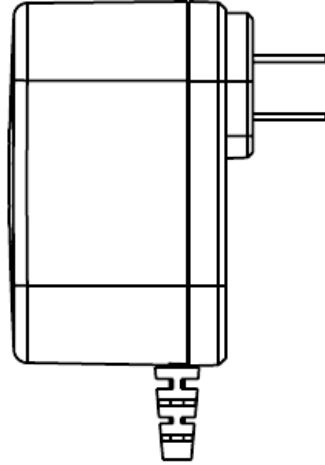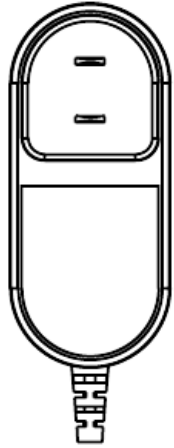

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41130-20VV-W2

August 17, 2022

## RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-41130-2016-11.0-W2	5 V	3	15.00	<a href="#">RFQ</a>
GT-41130-2016-6.0-W2	10 V	2	20.00	<a href="#">RFQ</a>
GT-41130-2016-4.0-W2	12 V	2	24.00	<a href="#">RFQ</a>
GT-41130-2016-2.2-W2	13.8 V	1.73	23.87	<a href="#">RFQ</a>
GT-41130-2016-1.0-W2	15 V	1.6	24.00	<a href="#">RFQ</a>
GT-41130-2016-W2	16 V	1.5	24.00	<a href="#">RFQ</a>
GT-41130-2024-6.0-W2	18 V	1.33	23.94	<a href="#">RFQ</a>
GT-41130-2424-W2	24 V	1	24.00	<a href="#">RFQ</a>

Model:GT-41130-20VV-W2

August 17, 2022

## SPECIFICATIONS

### A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
04. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% step load
05. Turn-ON Delay: 1 second, typical
06. Hold-Up Time: 8 mS typical at nominal input voltage and full load
07. Inrush Current: 30A typical at 115VAC input and 60A typical at 230VAC input
08. Switching Frequency: 65 KHz typical

### B) PROTECTION

01. Over-Voltage: Protected Zener clamp across the output
02. Short Circuit: Protected unit will auto recover upon removal of fault
03. Input Protection: Input line fusing

### C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Touch Current: <0.25mA @ 240Vac input voltage

### D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

### E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 47.6\*82.7\*37.7mm +/-1.0 mm
03. Markings: Label and/or Pad Printed and/or Molded in the case

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41130-20VV-W2

August 17, 2022

## DERATING CURVE

---

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41130-20VV-W2

August 17, 2022

**INPUT CONFIGURATION**

Description	NEMA 1-15P, North America Blades, Class II 2 Conductors
-------------	---

All NEMA 1 devices are two-wire non-grounding devices (hot-neutral) rated for 125 V maximum. NEMA 1-15P plugs have two parallel flat blades, 0.25 inches (6.35 mm) wide, 0.06 inches (1.524 mm) thick, 0.625-0.718 inches (15.875–18.256 mm) long, and spaced 0.5 inches (12.7 mm) apart.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41130-20VV-W2

August 17, 2022

**OUTPUT CONFIGURATION**

Common output connector options:


 L Type (Coaxial  
5.5x2.5mm plug)

 C Type (Coaxial  
5.5x2.1mm plug)

 K Type (Coaxial  
3.5x1.3mm plug)

 LL Type (5.5x2.5mm  
Locking 760k type)

 CL Type (5.5x2.1mm  
Locking S761k type)

 ML2 Type (Molex  
housing 43025-0200)

 YL3 Type  
(KPPX-3P)


YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ  
RC-5320A type  
connectors)

 MSB Type (Micro  
USB)

 USBC Type (USB  
Type C)

 Inquire for custom  
design

 For a comprehensive list of options, [click here](#)









Contact GlobTek for your specific requirements or custom solutions.



Model:GT-41130-20VV-W2

August 17, 2022

## Approvals

Logo	Description
No Logo	CB Certificate IEC 60950-1:2005 (2nd Edition), Am 1: 2009 + Am 2:2013
	CHINA SJ/T 11364-2014, China RoHS Chart: <a href="http://en.globtek.com/globtek-rohs.php">http://en.globtek.com/globtek-rohs.php</a>
	UL 60950-1, 2nd Edition, 2007-03-27 (Information Technology Equipment - Safety - Part 1: General Requirements) CSA C22.2 No. 60950-1-07, 2nd Edition, 2007-03for 10VDC,12VDC,15VDC,16VDC,24VDC
	
	Certification # TC RU AR46.B.69004 Custom Union of Russia, Belarus and Kazakhstan
	Indoor Use Only - Mark is on the label or Molded in the case
IP41	Ingress Protection: ?IP41 to IEC60529:2001 Protection against granular foreign bodies - Protected against vertically falling drops of water
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50473430, to J62368-1(H30) , J55032(H29),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: <a href="http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/">http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/</a>
<b>EFFICIENCY LEVEL</b> 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
LPS	Limited Power Source 60950
	Natural Resources Canada (NRCAN): CSA Standard C381.1-08, QSP NRCAN EEV1191; <a href="http://shop.csa.ca/en/canada/energy-efficiency/canca-c3811-08/inv/27024802008">http://shop.csa.ca/en/canada/energy-efficiency/canca-c3811-08/inv/27024802008</a>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41130-20VV-W2

August 17, 2022

 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: <a href="http://en.globtek.com/importing-to-japan.php">http://en.globtek.com/importing-to-japan.php</a> .
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) <a href="http://www.ce-mark.com/Rohs%20final.pdf">http://www.ce-mark.com/Rohs%20final.pdf</a>
 10276	Ukraine UKRSepro (Document: <a href="http://www.globtek.com/html/iso_certificates/GT_Ukraine.pdf">www.globtek.com/html/iso_certificates/GT_Ukraine.pdf</a> )
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU ( <a href="http://ec.europa.eu/environment/waste/weee/index_en.htm">http://ec.europa.eu/environment/waste/weee/index_en.htm</a> ) Mark is on the label or Molded in the case