

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83034-05VV-W2

December 8, 2021

## GT-83034-05VV-W2

### Information

Model Number

GT-83034-05VV-W2

Description

GT-83034-05VV-W2, ICT/ITE Power Supply, Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, NEMA 1-15P, North America Blades, Class II 2 Conductors, Output Rating: 5 Watts, Power rating with convection cooling (W) , 5-12V in 0.1V increments, Approvals: China RoHS; Double Insulation; Level V; RoHS;

Model Picture



Agency Documents

[Pending](#)

CE EC-Declaration

[https://www.globtek.com/pdf/ec\\_declaration/a0Oa000000C2XLrEAN](https://www.globtek.com/pdf/ec_declaration/a0Oa000000C2XLrEAN)

RoHS/RoHS2 Declaration

[https://www.globtek.com/pdf/rohs\\_cert/a0Oa000000C2XLrEAN](https://www.globtek.com/pdf/rohs_cert/a0Oa000000C2XLrEAN)

REACH Declaration

[https://www.globtek.com/pdf/iso\\_certificates/REACH.pdf](https://www.globtek.com/pdf/iso_certificates/REACH.pdf)

Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83034-05VV-W2

December 8, 2021

**MODEL PARAMETERS**


Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.2A
Wattage (W)	5.0
Vout Range (V)	5-12
Efficiency Level	V
Ingress Protection	
Size (mm)	66*41*25

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83034-05VV-W2

December 8, 2021

# ENCLOSURE

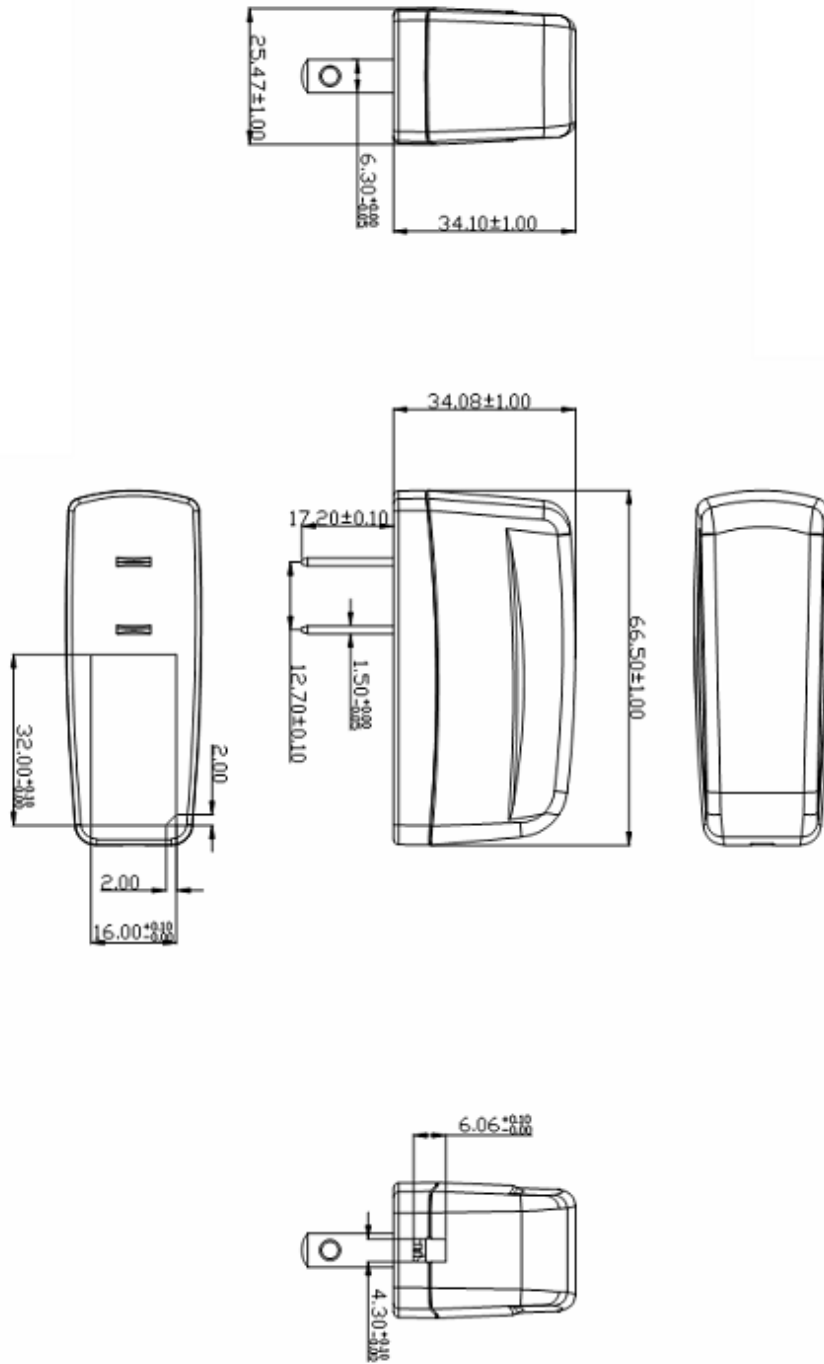

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83034-05VV-W2

December 8, 2021

**RATING TABLE**

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
--------------	---------	---------	----------	-----

## SPECIFICATIONS

### A) ELECTRICAL SPECIFICATIONS:

1. Input Voltage: 90-264 Vac
2. Input Current: 0.2 A RMS max
3. Input Frequency: 47 - 63 Hz
4. Output Regulation: +/- 5% measured at the output connector
5. Line Voltage Regulation: +/- 2% typical measures at full load
6. Output Ripple (Vp-p): 100 mV measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of output connector at nominal line
7. Turn-On/Turn-Off Overshoot: 5% maximum, 1mS typical recovery time for 25% step load
8. Turn-On Delay: <3 second typical
9. Hold-Up Time: 5mS typical @ nominal input voltage & full load
10. Inrush Current: 30A typical @ 115Vac input ; 60A typical @ 230Vac input
11. Switching Frequency: 65 KHz typical
12. Efficiency: 68.17% average

### B) PROTECTION

1. Over-Voltage: Electronically Protected, unit will recover upon removal of fault
2. Short Circuit: Electronically Protected, unit will recover upon removal of fault
3. Input Protection: Input line fusing

### C) SAFETY

1. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
2. Earth Leakage Current: <0.25 mA @ nominal input voltage

### D) OTHER:

1. MTBF: 200,000 hours @ 25°C ambient temperature
2. Operating Temperature: 0°C to 40°C ambient temperature
3. Humidity: 20% to 85% relative humidity
4. Storage Temperature: -20°C to 80°C
5. Storage Humidity: 5% to 95% relative humidity

### E) ENCLOSURE

1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 67.5\*26.5\*52.4 mm +/-1.0
4. Weight: 80 g maximum

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83034-05VV-W2

December 8, 2021

## DERATING CURVE

---

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83034-05VV-W2

December 8, 2021

**INPUT CONFIGURATION**

Description	NEMA 1-15P, North America Blades, Class II 2 Conductors
-------------	---

All NEMA 1 devices are two-wire non-grounding devices (hot-neutral) rated for 125 V maximum. NEMA 1-15P plugs have two parallel flat blades, 0.25 inches (6.35 mm) wide, 0.06 inches (1.524 mm) thick, 0.625-0.718 inches (15.875–18.256 mm) long, and spaced 0.5 inches (12.7 mm) apart.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83034-05VV-W2

December 8, 2021

**OUTPUT CONFIGURATION**

Common output connector options:



L Type (Coaxial 5.5x2.5mm plug)



C Type (Coaxial 5.5x2.1mm plug)



K Type (Coaxial 3.5x1.3mm plug)



LL Type (5.5x2.5mm Locking 760k type)



CL Type (5.5x2.1mm Locking S761k type)



ML2 Type (Molex housing 43025-0200)



YL3 Type (KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ RC-5320A type connectors)



MSB Type (Micro USB)



USBC Type (USB Type C)



Inquire for custom design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.



Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83034-05VV-W2

December 8, 2021

## Approvals

Logo	Description
	CHINA SJ/T 11363-2006, China RoHS Chart: <a href="http://en.globtek.com/globtek-rohs.php">http://en.globtek.com/globtek-rohs.php</a>
	
<b>EFFICIENCY LEVEL</b> 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) <a href="http://www.ce-mark.com/Rohs%20final.pdf">http://www.ce-mark.com/Rohs%20final.pdf</a>