

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020

GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

Information

Model Number	GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation
Description	GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation, ITE / Medical Power Supply/Class 2/Household Power Supply, Potted/Encapsulated in plastic housing, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, 2 Pole 5.0MM Pitch UL94V-0 Rated Terminal Block, Color may vary., Output Rating: 20 Watts, Power rating with convection cooling (W) , 5-48V in 0.1V increments, Approvals: EAC; WEEE; China RoHS; Ukraine; Double Insulation; PSE; CB EN/IEC 60335-1; CE; Fuse 60335; NEMKO EN/IEC 60335-1; RoHS; VCCI; cETLus UL1310; IEC 61558-1; CB 61558-2-16; UL 1310; UL 1310; cETLus UL1310; Fuse 60335;

Model Picture



Agency Documents	http://globtek.info/certs/GTM93021
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000C2dSrEAJ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000C2dSrEAJ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020

MODEL PARAMETERS


Type	Potted/Encapsulated in plastic housing
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ITE / Medical Power Supply/Class 2/Household Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.6 A Max
Wattage (W)	20.0
Vout Range (V)	5-48
Efficiency Level	V
Ingress Protection	IP68
Size (mm)	48.0*51.0*35

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020

ENCLOSURE

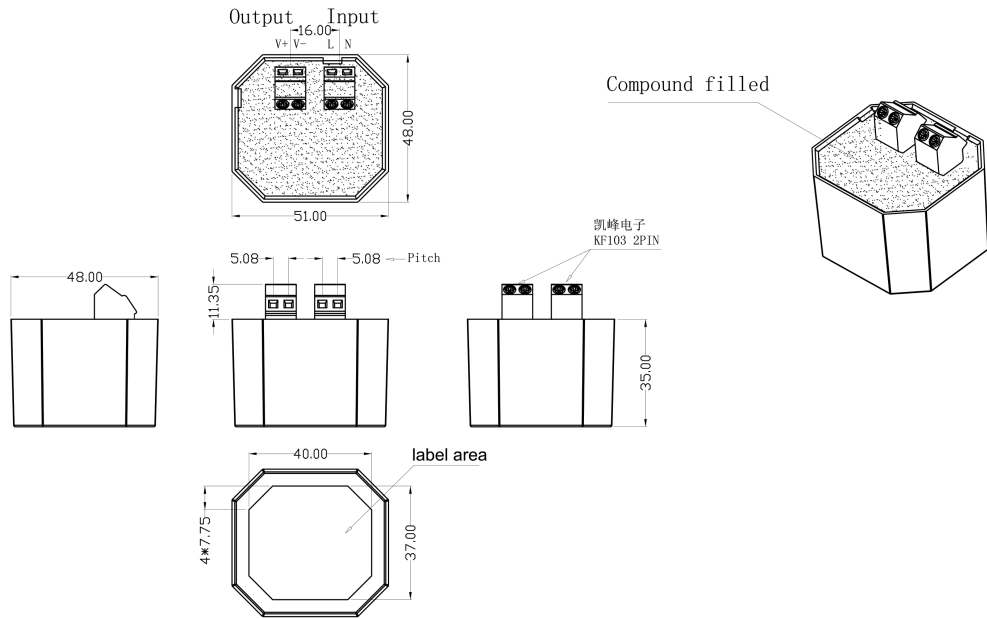

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil f¼r Unterputz Installation

April 10, 2020

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTM93021-1507-2.0-T2	5 V	3	15.00	RFQ
GTM93021-1507-1.0-T2	6 V	2.5	15.00	RFQ
GTM93021-1809-T2	9 V	2	18.00	RFQ
GTM93021-2009-T2	9 V	2.22	19.98	RFQ
GTM93021-2015-3.0-T2	12 V	1.67	20.04	RFQ
GTM93021-2024-T2	24 V	0.83	19.92	RFQ
GTM93021-2036-T2	36 V	0.56	20.16	RFQ
GTM93021-2048-T2	48 V	0.42	20.16	RFQ

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at full load
05. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
06. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% to 50% step load
07. Turn-ON Delay: 3000 mS, maximum @ full load, nominal line
08. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
09. Inrush Current: 30A maximum cold start @ 240Vac input
10. Switching Frequency: 65 KHz typical

B) PROTECTION

01. Over-Voltage: Electronically Protected Zener clamp across the output
02. Short Circuit: Electronically Protected unit will auto recover upon removal of fault
04. Input Protection: Input line and neutral fusing

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Touch Current: Maximum allowed values: 100uA NC(Normal condition) 500uA SFC(single fault condition)
03. Earth continuity test:<0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
04. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 50°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 48.0 Length x 51.0 Width x 35.0 High mm +/-1.0 mm suitable for installation in North American 1-Gang Old Work Electrical Box / typical unterputz Power Supply (netzteil) for "Hohlwanddose" per VDE0606 (Einbau-Netzteil Stromversorgung für Unterputz-Installation)
03. Markings: Label and/or Pad Printed and/or Molded in the case

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<http://en.globtek.com/datasheet/id/a00a000000C2dSr>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020

DERATING CURVE

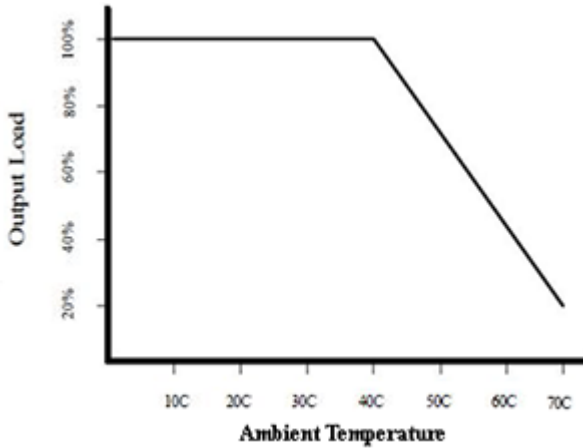

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil für Unterputz Installation

April 10, 2020

INPUT CONFIGURATION

Description 2 Pole 5.0MM Pitch UL94V-0 Rated Terminal Block, Color may vary.



Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020

OUTPUT CONFIGURATION

Common output connector options:


 L Type (Coaxial
5.5x2.5mm plug)

 C Type (Coaxial
5.5x2.1mm plug)

 K Type (Coaxial
3.5x1.3mm plug)

 LL Type (5.5x2.5mm
Locking 760k type)

 CL Type (5.5x2.1mm
Locking S761k type)

 ML2 Type (Molex
housing 43025-0200)

 YL3 Type
(KPPX-3P)


YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)

 MSB Type (Micro
USB)

 USBC Type (USB
Type C)

 Inquire for custom
design

 For a comprehensive list of options, [click here](#)








Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil fÃ¼r Unterputz Installation

April 10, 2020











Approvals

Logo	Description
	Book 60335 up to 36 Volts
No Logo Applicable	CB to 60335-1 5th Edition (Safety of Household and Similar Electrical Appliances, Part 1: General Requirements) CB Report/ Certificate IEC 60335-1:2010 Up to 36 volts only
No Logo Applicable	CB report to IEC 61558-2-16_2009 1st Edition IEC 61558-1_2005 2nd Edition + A1_2009 EN 61558-1-16_2009 EN 61558-1_2005 + A1_2009.pdf
	CE Certification
	Conforms to UL Std. 1310 CLASS 2 Power Units Cert. to CSA Std. C22.2 NO. 223 Up to 36 volts
	cETLus-Cert 4007497 UL1310 Recognized Component up to 36 volts
	CHINA SJ/T 11364-2014, China RoHS Chart: http://en.globtek.com/globtek-rohs.php
	Certification # TC RU AR46.B.75423 Custom Union of Russia, Belarus and Kazakhstan
	Fuse 60335 T1.6A 250VAC Up to 36 volts

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil f¼r Unterputz Installation


April 10, 2020

Ta:50°C	IEC 61558-1 GTM93021 Maximum Ambient Temperature, Max 50°C
	Indoor Use Only - Mark is on the label or Molded in the case
 IEC/EN60335-1	NEMKO IEC/EN 60335-1 (Safety of Household and Similar Electrical Appliances, Part 1: General Requirements) up to 36 Volts
 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: http://en.globtek.com/importing-to-japan.php .
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	Transformer Symbol IEC 61558-1 SMPS Short-Circuit –Proof Safety Isolating Transformer
	Transformer Symbol IEC 61558-1 SMPS Switch Mode Power supply
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
 WARNING RISK OF ELECTRIC SHOCK DRY LOCATION USE ONLY FOR INDOOR USE ONLY See instructions if the input plug does not fit the power outlet	UL1310 Warning Label Up To 36 Volts For GTM93021 Only 1 of 2
 DO NOT REMOVE THE TAG AVERTISSEMENT Risque de choc électrique Utilisation endroit sec Pour une utilisation en intérieur	UL1310 Warning Label Up To 36 Volts For GTM93021 Only 2 of 2
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-T2 (terminal block) Einbau-Netzteil für Unterputz Installation

April 10, 2020



PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<http://en.globtek.com/datasheet/id/a0Oa000000C2dSr>