

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

Information

| | |
|--------------|---|
| Model Number | GTM93021-20VV-FWD2 (PCB Mount/Pins no housing) |
| Description | GTM93021-20VV-FWD2 (PCB Mount/Pins no housing), ITE / Medical Power Supply/Class 2/Household Power Supply, Potted/Encapsulated in plastic housing, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, Solder Pins for Line & Neutral, 1.4 mm square pins, 4.5 mm long, Output Rating: 20 Watts, Power rating with convection cooling (W) , 5-48V in 0.1V increments, Approvals: CE; WEEE; Double Insulation; RoHS; IEC 61558-1; |

Model Picture



| | |
|-------------------------------|---|
| Agency Documents | http://globtek.info/certs/GTM93021 |
| CE EC-Declaration | https://www.globtek.com/pdf/ec_declaration/a00a000000JCuUgEAL |
| RoHS/RoHS2 Declaration | https://www.globtek.com/pdf/rohs_cert/a00a000000JCuUgEAL |
| REACH Declaration | https://www.globtek.com/pdf/iso_certificates/REACH.pdf |
| Conflict Minerals Declaration | https://www.globtek.com/pdf/conflict-minerals.pdf |

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

MODEL PARAMETERS

| | |
|--------------------|---|
| Type | Potted/Encapsulated in plastic housing |
| Technology | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category | ITE / Medical Power Supply/Class 2/Household Power Supply |
| Input Voltage | 100-240V~, 50-60 Hz |
| I/P Amps (A) | 0.6 |
| Wattage (W) | 20.0 |
| Vout Range (V) | 5-48 |
| Efficiency Level | V |
| Ingress Protection | IP68 |
| Size (mm) | 42.26*45.26*25 |

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<http://en.globtek.com/datasheet/id/a0Oa000000JCuUg>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

ENCLOSURE

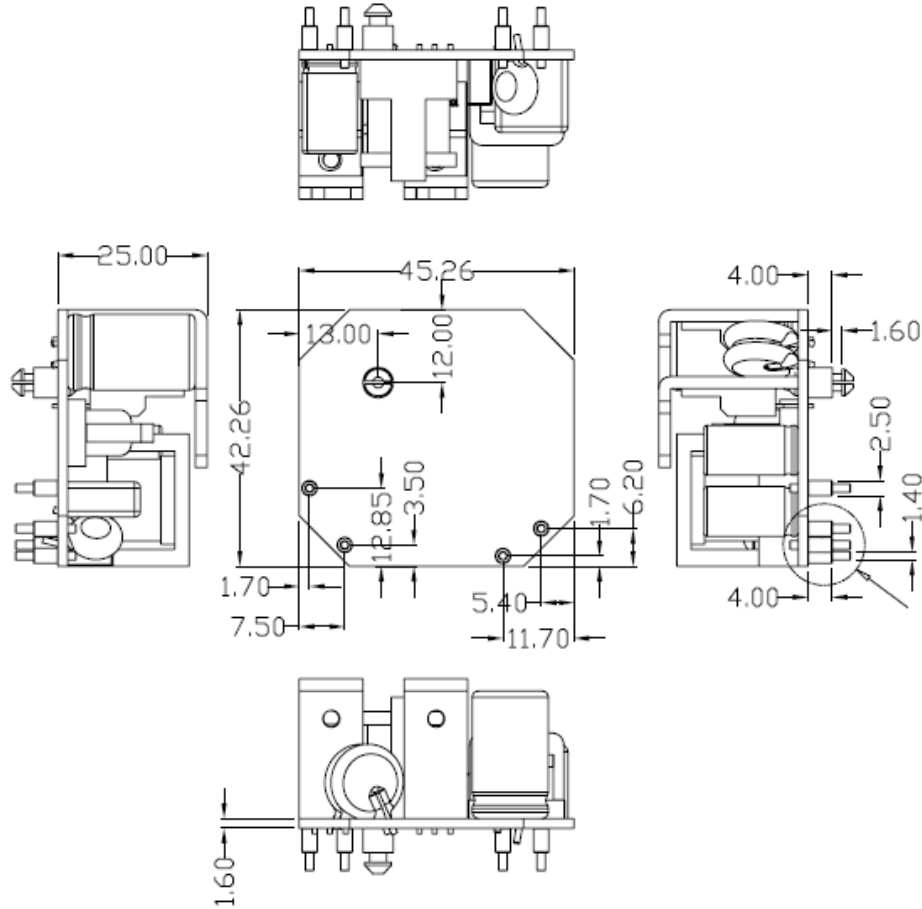


Nylon Stability Pin Detail:

MATERIAL:NYLON 66 (UL)
FLAME CLASS:94V-2

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

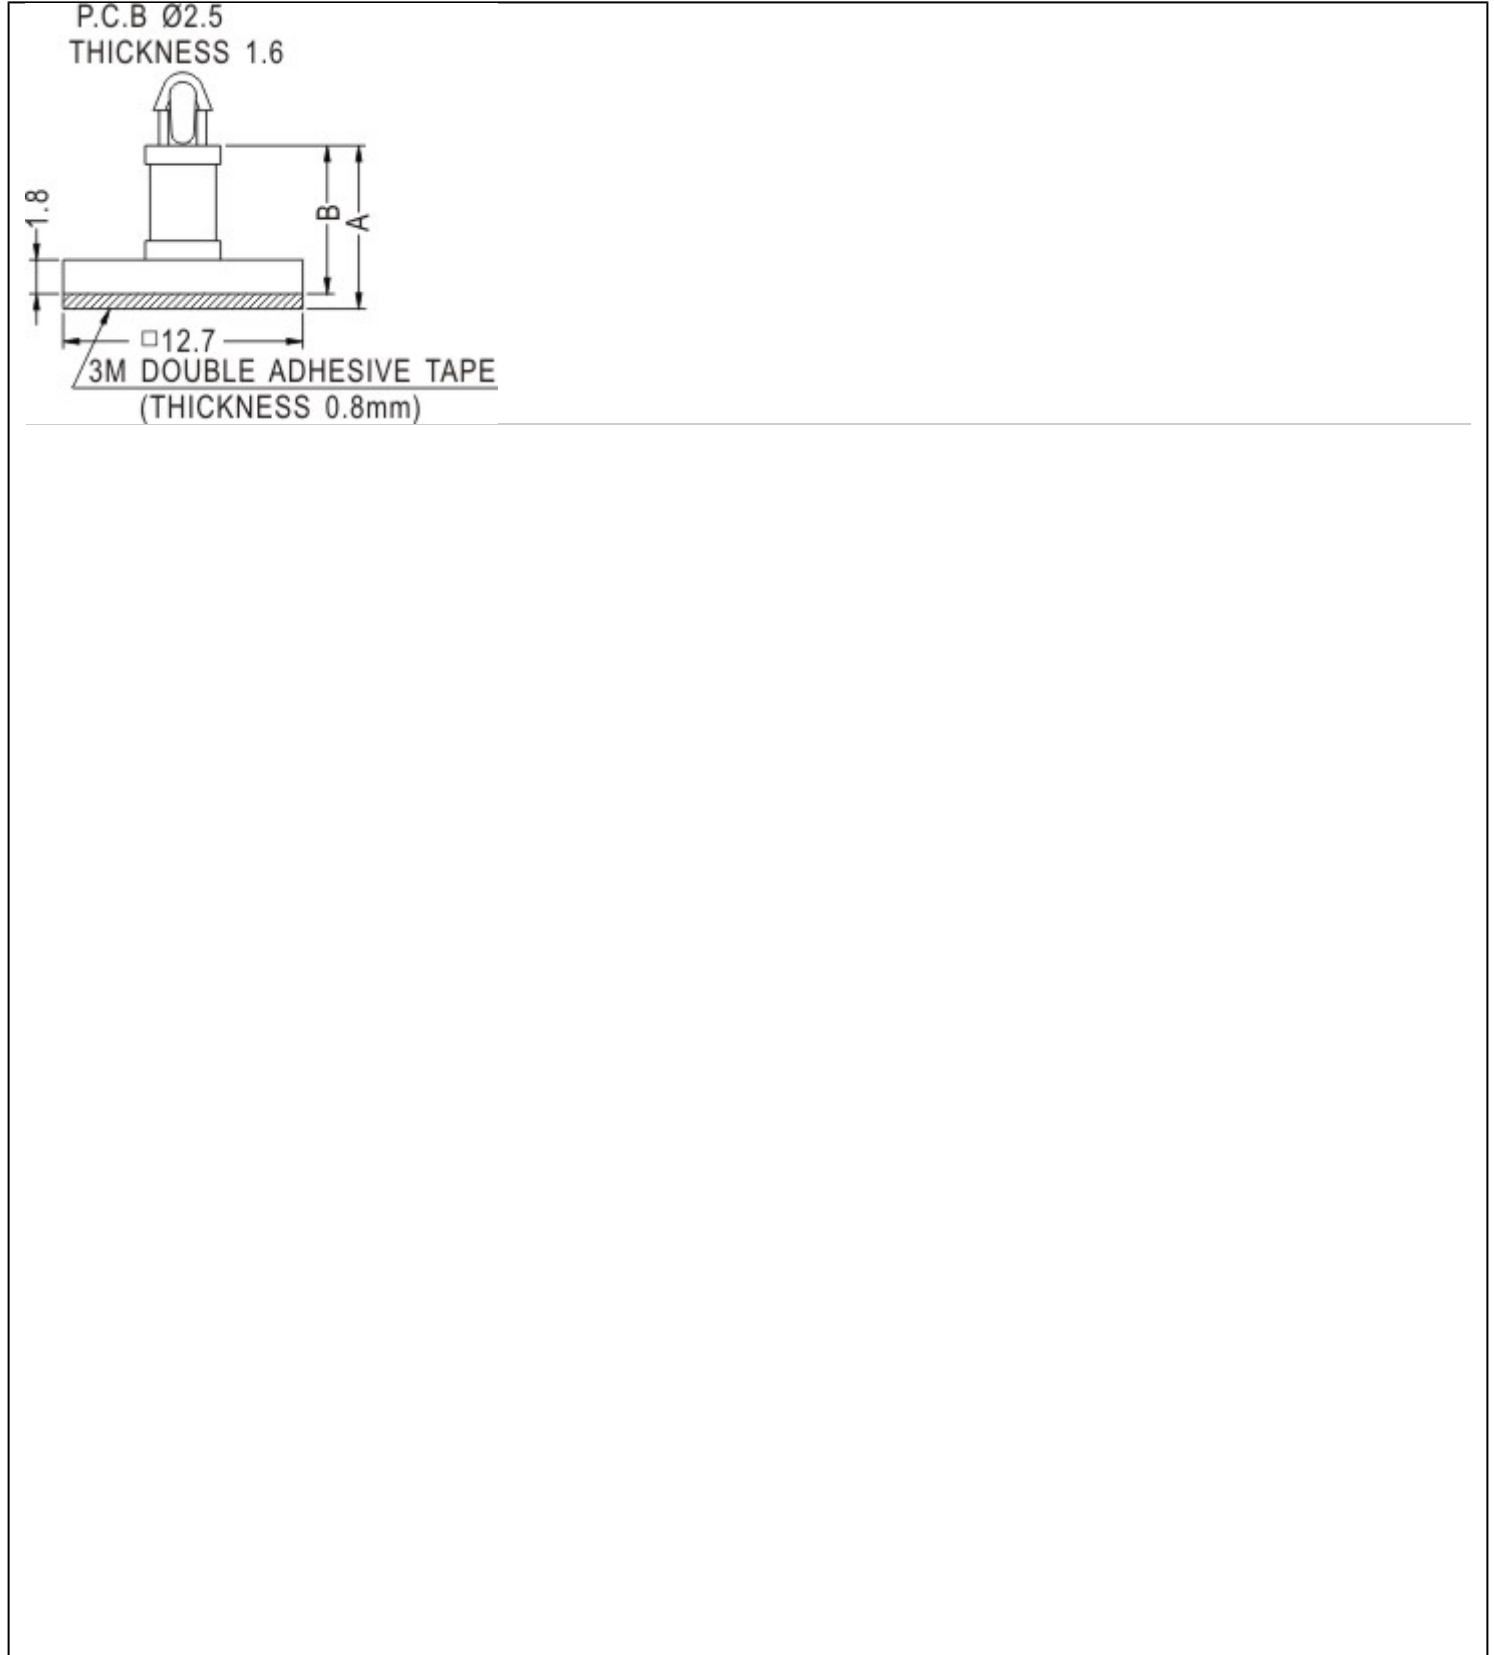

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<http://en.globtek.com/datasheet/id/a0Oa000000JCuUg>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

RATING TABLE

| Model Number | Voltage | Amps(A) | Watts(W) | RFQ |
|----------------------|---------|---------|----------|---------------------|
| GTM93021-1507-2.0-D2 | 5 V | 3 | 15.00 | RFQ |
| GTM93021-1809-D2 | 9 V | 2 | 18.00 | RFQ |
| GTM93021-2009-D2 | 9 V | 2.22 | 19.98 | RFQ |
| GTM93021-2015-3.0-D2 | 12 V | 1.67 | 20.04 | RFQ |
| GTM93021-2024-D2 | 24 V | 0.83 | 19.92 | RFQ |
| GTM93021-2036-D2 | 36 V | 0.56 | 20.16 | RFQ |
| GTM93021-2048-D2 | 48 V | 0.42 | 20.16 | RFQ |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at full load
05. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
06. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% to 50% step load
07. Turn-ON Delay: 3000 mS, maximum @ full load, nominal line
08. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
09. Inrush Current: 30A maximum cold start @ 240Vac input
10. Switching Frequency: 65 KHz typical

B) PROTECTION

01. Over-Voltage: Electronically Protected Zener clamp across the output
02. Short Circuit: Electronically Protected unit will auto recover upon removal of fault
04. Input Protection: Input line and neutral fusing

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Earth Leakage Current: <0.25 mA at 240Vac input voltage
03. Earth continuity test:<0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
04. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 48.0 Length x 51.0 Width x 35.0 High mm +/-1.0 mm typical Unterputz Power Supply (netzteil) for "Hohlwanddose" per VDE0606 (Einbau-Netzteil Stromversorgung für Unterputz-Installation)
03. Markings: Label and/or Pad Printed and/or Molded in the case

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<http://en.globtek.com/datasheet/id/a0Oa000000JCuUg>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

DERATING CURVE

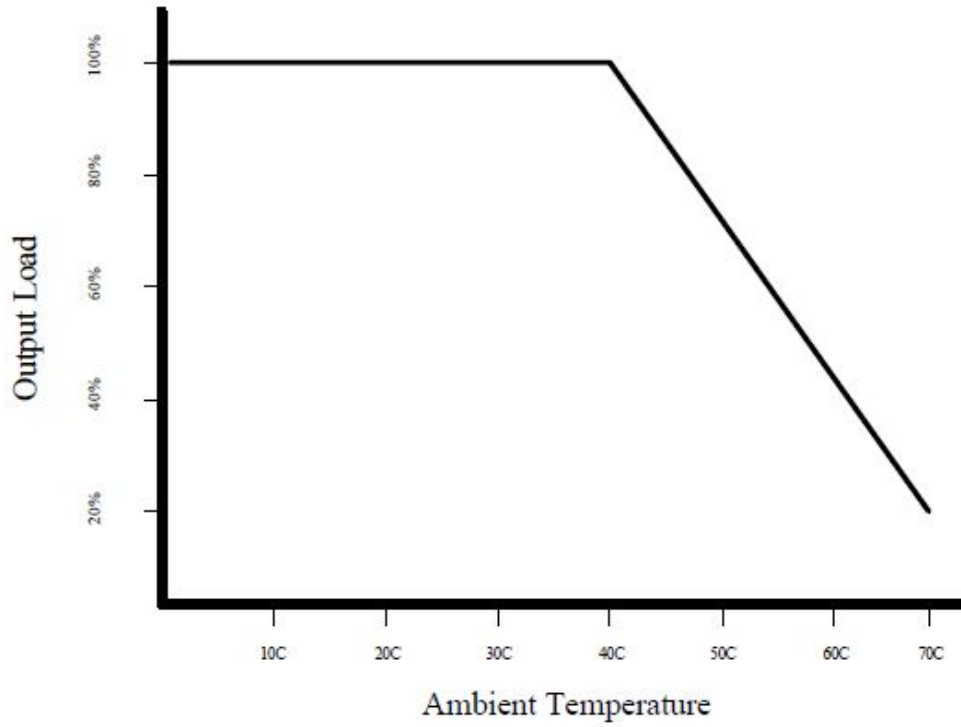

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

INPUT CONFIGURATION

| Description | Solder Pins for Line & Neutral, 1.4 mm square pins, 4.5 mm long |
|-------------|---|
|-------------|---|

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<http://en.globtek.com/datasheet/id/a0Oa000000JCuUg>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial 5.5x2.5mm plug)



C Type (Coaxial 5.5x2.1mm plug)



K Type (Coaxial 3.5x1.3mm plug)



LL Type (5.5x2.5mm Locking 760k type)



CL Type (5.5x2.1mm Locking S761k type)



ML2 Type (Molex housing 43025-0200)



YL3 Type (KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ RC-5320A type connectors)



MSB Type (Micro USB)



USBC Type (USB Type C)



Inquire for custom design

For a comprehensive list of options, [click here](#)





Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM93021-20VV-FWD2 (PCB Mount/Pins no housing)

April 10, 2020

Approvals

| Logo | Description |
|---|--|
|  | CE Certification |
| Ta:50°C | IEC 61558-1 GTM93021 Maximum Ambient Temperature, Max 50°C |
| RoHS | Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf |
|  | Transformer Symbol IEC 61558-1 SMPS Short-Circuit –Proof Safety Isolating Transformer |
|  | Transformer Symbol IEC 61558-1 SMPS Switch Mode Power supply |
|  | WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case |