

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

GT-T104P500VVV-X.X-C

Information

Model Number	GT-T104P500VVV-X.X-C
Description	GT-T104P500VVV-X.X-C, ICT/ITE Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 90 ~ 264VAC, 127 ~ 370VDC (47 ~ 63Hz), Terminal Block, Output Rating: 500 Watts, Power rating with convection cooling (W) , 3-200V in 0.1V increments, Approvals: VCCI; Ukraine; RoHS; China RoHS; CE; WEEE;

Model Picture



Agency Documents

CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000MmgGjEAJ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000MmgGjEAJ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

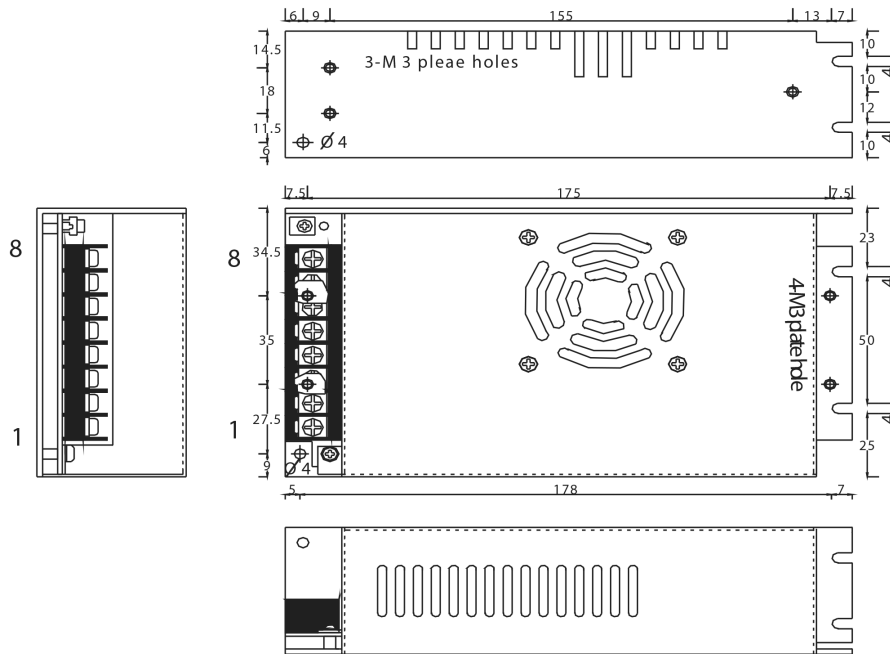
MODEL PARAMETERS

Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	90 ~ 264VAC, 127 ~ 370VDC (47 ~ 63Hz)
I/P Amps (A)	6A
Wattage (W)	500.0
Vout Range (V)	3-200
Efficiency Level	N/A
Ingress Protection	
Size (mm)	190(L) x 106(W) x 50(H)mm

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

ENCLOSURE


UNIT : mm
 DIMENSIONS : 190(L) x 106(W) x 50(H)mm
 MATERIAL : ALUMINUM
 COLOR : SILVER

PCB Barrier Terminal Block

	Pin	Single	Description
INPUT	1	N	L : Line Terminal of Input N : Neutral Terminal of Input
	2	L	FG : Ground (Earth)
	3	FG	No Polarity At DC Input
OUTPUT	4	G	NC : No connection G : DC Output Ground Terminal/Common
	5,6	G	Vx : DC Output Terminal (Specify at spec.)
	7,8	V1	

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-T104P50012-C	12 V	41.6	499.20	RFQ
GT-T104P50024-C	24 V	20.8	499.20	RFQ

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

SPECIFICATIONS

Features:

Universal AC input / Full range
Programmable output Voltage (-10% + 10%)
Split rail & Series connection possible
Protection: OVP, OLP, Short protection

ELECTRICAL SPECIFICATIONS:

Output: DC
DC Voltage Range: 3-200VDC
Rated Power: 500W,
Ripple & Noise (Max.): up to 15V: 150mVp-p, Over 15V 1% mVp-p
Voltage Adj. Range: $\pm 10.0\%$ Typical
Line Regulation: $\pm 1.0\%$
Load Regulation: $\pm 1.0\%$
Hold Up Time (Typ.): 10ms / 230VAC at full load

Input

Voltage Range: 100 ~ 240VAC, 127 ~ 380VDC
Frequency Range: 47 ~ 63Hz
Power Factor : 95% Min/110VAC
Efficiency (Typ.): up to 15V : 78%, 24V :80%, 48V : 82% above 110V :83%
Inrush Current (Typ.): 20A / 115VAC, 40A / 230VAC

Protection

Over Load: Automatic power limited
Over Voltage: Autorecovery

Environment

Working Temp.: -15 ~ +50°C (Refer to load de-rating curve)
Working Humidity: 20 ~ 90% RH non-condensing
Storage Temp. & Humidity: -20 ~ +85°C, 10 ~ 95% RH
Vibration: 2G, 10~500Hz, 3 axes

Others

Cooling: Load and temperature control fan
Dimension (WxHxD): 190x50x106 mm
Weights: 1040g

Note

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Tolerance: includes setup time tolerance, line regulation and load regulation.

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://en.globtek.com/datasheet/id/a00a000000MmgGj>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

4. De-rating may apply in low input voltage. Please check the de-rating curve for more details.
5. In parallel connection only one unit will operate if the total output load is less than 5% of the rated power.
6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets
7. This test is done without enclosure.

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

DERATING CURVE

N/A

Delivering leading edge, innovative power solutions for more than **30** years....

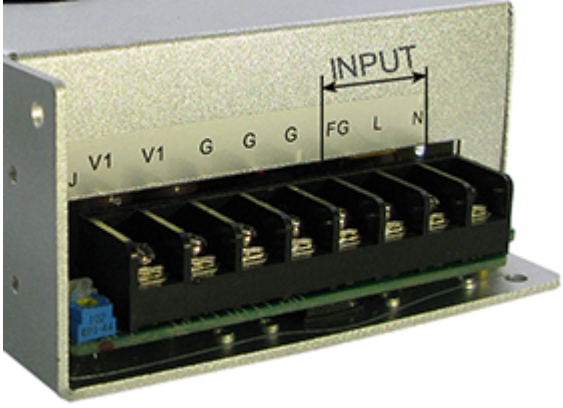
Model:GT-T104P500VVV-X.X-C

September 28, 2021

INPUT CONFIGURATION

Description

Terminal Block



Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-T104P500VVV-X.X-C


September 28, 2021

OUTPUT CONFIGURATION

Common output connector options:


 L Type (Coaxial
5.5x2.5mm plug)

 C Type (Coaxial
5.5x2.1mm plug)

 K Type (Coaxial
3.5x1.3mm plug)

 LL Type (5.5x2.5mm
Locking 760k type)

 CL Type (5.5x2.1mm
Locking S761k type)

 ML2 Type (Molex
housing 43025-0200)

 YL3 Type
(KPPX-3P)


YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)

 MSB Type (Micro
USB)

 USBC Type (USB
Type C)

 Inquire for custom
design

 For a comprehensive list of options, [click here](#)








Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-T104P500VVV-X.X-C

September 28, 2021

Approvals

Logo	Description
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://en.globtek.com/globtek-rohs.php
	Indoor Use Only - Mark is on the label or Molded in the case
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	UKCA Certification
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case