

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

GT-86180-18VV-G (G-blade)

Information

| | |
|--------------|--|
| Model Number | GT-86180-18VV-G (G-blade) |
| Description | GT-86180-18VV-G (G-blade), ITE Power Supply, Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60Hz, Blade Options for G- Series Wall Plug-in Power Supplies, Output Rating: 18 Watts, Power rating with convection cooling (W) , 12VV in 0.1V increments, Approvals: cULus; EAC; PSE; |

Model Picture



| | |
|-------------------------------|---|
| Agency Documents | http://en.globtek.com/safety-agency-documents-pending/ |
| CE EC-Declaration | https://www.globtek.com/pdf/ec_declaration/a00a000000MmpA8EAJ |
| RoHS/RoHS2 Declaration | https://www.globtek.com/pdf/rohs_cert/a00a000000MmpA8EAJ |
| REACH Declaration | https://www.globtek.com/pdf/iso_certificates/REACH.pdf |
| Conflict Minerals Declaration | https://www.globtek.com/pdf/conflict-minerals.pdf |

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

MODEL PARAMETERS





| | |
|--------------------|---|
| Type | Wall Plug-in |
| Technology | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category | ITE Power Supply |
| Input Voltage | 100-240V~, 50-60Hz |
| I/P Amps (A) | 1A |
| Wattage (W) | 18.0 |
| Vout Range (V) | 12V |
| Efficiency Level | USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782 |
| Ingress Protection | IPX0 |
| Size (mm) | 83.9(L) *49(W) *39.5(H) |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

ENCLOSURE

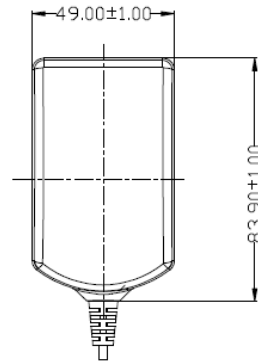

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

RATING TABLE

| Model Number | Voltage | Amps(A) | Watts(W) | RFQ |
|-----------------|---------|---------|----------|---------------------|
| GT-86180-1812-G | 12 V | 1.5 | 18.00 | RFQ |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output regulation: 4.5V-5.3V
04. Ripple and Noise (Vp-p): 250 mVp-p maximum, At 20 MHz, and output parallel with 0.1uF & 10uF capacitors to ground, Temperature at 25 °C, and nominal AC input voltage
05. Average Efficiency: 78.5% minimum , At nominal input voltage average Efficiency meet CEC VI and ErP European Commission's Ecodesign Directive (2005/32/EC) / CoC Tier 2 Compliant
06. Turn-ON Delay: 3s maximum at nominal AC input voltage

B) PROTECTION

01. Over-Voltage: 14V maximum
02. Over current protection: 4.5A maximum with auto-recovery function
03. Short Circuit: The adapter shall not be damaged by short the DC output to Ground.

C) SAFETY

01. Dielectric Withstand Voltage: Primary To Secondary: 3000VAC 10mA 1minute or 4242VDC 10mA 1minute
02. Leakage Current:25mA maximum, at nominal AC input voltage and frequency
03. ESD:8KV(air) / 4KV (contact)

D) EMC

01. Emissions, per EN 55032, EN 61000-6-3, EN 61000-6-4
Conducted Emissions: Class B, FCC Part 15, Class B
Radiated Emissions: Class B, FCC Part 15, Class B
02. Line Frequency Harmonics EN61000-3-2, Class A
03. Voltage Fluctuations/Flicker EN61000-3-3
04. Immunity, per EN 55024, EN 61000-6-1, EN 61000-6-2
Static Discharge Immunity EN61000-4-2, 4kV Contact Discharge, 8kV air discharge
Radiated RF Immunity EN61000-4-3, 3V/m 80-1000MHz, 80% 1KHz AM.
EFT/Burst Immunity EN61000-4-4, 1kV/100kHz.
Line Surge Immunity EN61000-4-5, 1kV differential, 2kV common-mode
Conducted RF Immunity EN61000-4-6, 3Vrms, 80% 1KHz AM
Power Frequency Magnetic Field Immunity EN61000-4-8, 1A/m
Voltage Dip Immunity EN61000-4-11, Criteria

E) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -20°C to 60°C
05. Cooling: natural convection cooling
06. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<http://en.globtek.com/datasheet/id/a00a000000MmpA8>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

F) ENCLOSURE

- 01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
 - 02. Markings: Label and/or Pad Printed and/or Molded in the case
-

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

DERATING CURVE



Delivering leading edge, innovative power solutions for more than 30 years....


Model:GT-86180-18VV-G (G-blade)

August 8, 2020

INPUT CONFIGURATION

Description

Blade Options for G- Series Wall Plug-in Power Supplies

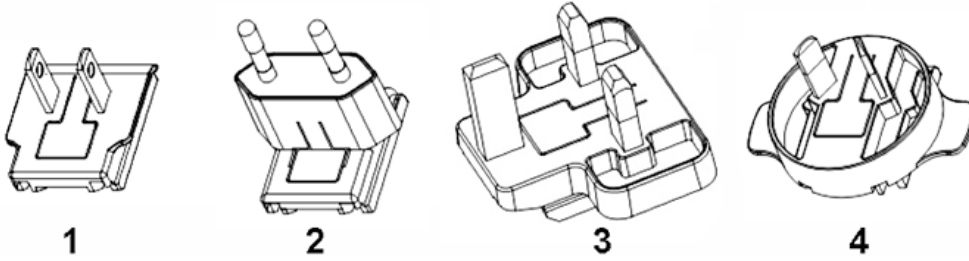

INPUT CONNECTOR: G-Socket (below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "G-KIT" if specified

01. United States / Canada / Japan NEMA 1-15P configuration: NA 2 blades, Class II; US/CA/JP P/N: G-NA(R)

02. European CEE 7/16 configuration: Europlug 2 pins, Class II; EU P/N: G-EU(R)

03. UK BS 1363 configuration: UK 3 blade with dummy Ground, Class II; GB P/N: G-UK(R)

04. Australian AS 3112 configuration: SAA 2 blade, Class II; AU P/N: G-SAA(R)

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

OUTPUT CONFIGURATION

Common output connector options:


 L Type (Coaxial
5.5x2.5mm plug)

 C Type (Coaxial
5.5x2.1mm plug)

 K Type (Coaxial
3.5x1.3mm plug)

 LL Type (5.5x2.5mm
Locking 760k type)

 CL Type (5.5x2.1mm
Locking S761k type)

 ML2 Type (Molex
housing 43025-0200)

 YL3 Type
(KPPX-3P)


YL4 Type (KPPX-4P)


 EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)

 MSB Type (Micro
USB)

 USBC Type (USB
Type C)

 Inquire for custom
design

 For a comprehensive list of options, [click here](#)





Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-86180-18VV-G (G-blade)

August 8, 2020

Approvals

| Logo | Description |
|--|--|
|  | UL 60950-1, 2nd Edition, 2014-10-14 (Information Technology Equipment - Safety - Part 1: General Requirements) CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10 (Information Technology Equipment - Safety - Part 1: General Requirements) |
|  | Declaration ДС № EAЭC N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belarus and Kazakhstan http://www.globtek.com/redirect/?loc=gost-certificate-eac-declaration |
|  GlobTek, Inc. | JAPAN TUV R-PSE, Cert. No. JD 50473430, to J62368-1(H30) , J55032(H29),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: http://en.globtek.com/importing-ite-and-medical-power-supplies-ac-adaptors-to-japan/ |
|  | Morocco SDoC declaration http://www.globtek.info/certs/Morocco%20SDoC%20Declaration/ |